


**Electro-hydraulic  
two post lifts with  
top connection**



**Internally reinforced  
column structure** for  
little bending and  
internal cable guiding

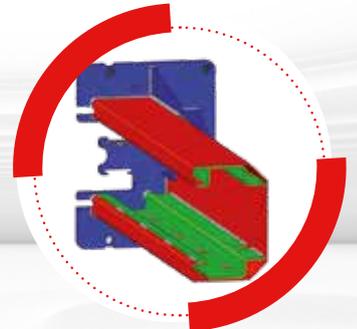

Four **three-section  
symmetrical** arms.

**Possibility of installation in symmetrical or  
asymmetric version.**

# ERCO HC5502 - ERCO HC4502



Realignment of the two carriages using metal cables that guarantee excellent synchronisation. **Standard height of two-post connection: 4,050 mm.**

Available versions (with optional column extension set):

- **V:** Specific for vans (Height of two-post connection: 4,620 mm).
- **XV:** Specific for vans and very high vehicles, extra-high version (Height of two-post connection: 5,220 mm).



## PROTECTIONS

Rubber door protections.  
**Toothed sector arm**  
rotation stop system



## SAFETY

**Electro magnet** safety  
release **24V**

## INCLUDED ACCESSORIES

Safety stop-bar included as standard.

Two set of extension pads  
h= 80 mm and h= 180 mm

## RECOMMENDED ACCESSORIES



**8-43100224 - 8-43100225**

Column extension set


See separate catalogue for further accessories.

## TECHNICAL DATA


Model	Erco HC5502	Erco HC4502
Lift capacity	<b>5500 kg</b>	<b>4500 kg</b>
Lifting time	<b>45 s</b>	
Three phase motor	<b>400/230V - 3kW - 3Ph - 50/60Hz</b>	
Single phase motor	<b>230V - 3kW - 1Ph - 50/60Hz</b>	
Max. lifting height	<b>2062 mm</b>	
Max. locking position	<b>1957 - 2037 mm</b>	
Lift minimum height	<b>115 mm</b>	
Height connection	<b>4050/4620/5520 mm</b>	

## DIMENSIONS

### ERCO HC4502 Symmetric Installation

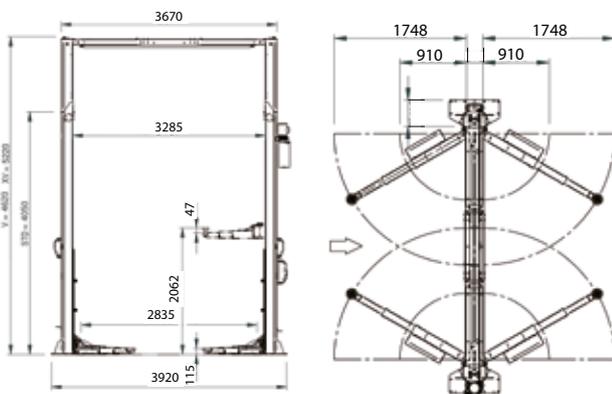

### ERCO HC5502 Asymmetric Installation

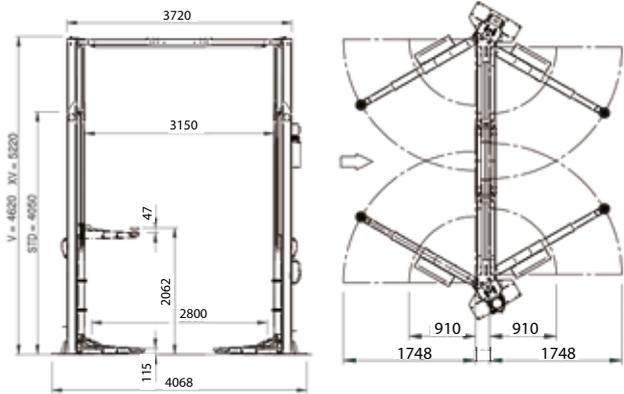

The manufacturer reserves the right to modify the features of its products at any time.



NEXION SPA - [www.corghi.com](http://www.corghi.com) - [info@corghi.com](mailto:info@corghi.com)

Designed in



Cod. DPCG001391A\_07/2024

